



RIGID

7.5 > 32T

Cold made-to-measure



RIGID

7.5 > 32T

FLEXIBILITY AT THE SERVICE OF YOUR PROFITABILITY



The Lamberet Rigid range offers you a made-to-measure solution from the small vehicle with a 7.5 tonnes PTAC to the larger 3 or 4 axle rigid vehicles.

Our bodies are designed to fit all types of chassis.

Our bodyworks adapt to your dedicated logistics and optimise your profitability.

Single or multi temperature, our technical solutions such as mobile or fixed bulkheads, leaf-type or sliding side doors, barn, shutter or lift-up rear doors, retractable or folding taillifts will satisfy all your requirements.

Pallets, trolleys, flowers, meat hanging, fresh products, frozen products, ice-cream, Lamberet has the solution.

The back of the chassis is specially fitted out to protect the body against the repeated loading/unloading operations of urban distribution.

The Lamberet bodies equip the rigid vehicles but are also used on many articulated lorries in France and throughout Europe. Lamberet also handles specialised logistics such as road/road with swap bodies.



THE LAMBERET BONUSES

Reinforced rear protection:

As an option, the rigid vehicle chassis can be fitted with reinforcement arms and roller buffers in order to absorb the shocks during the frequent loading/unloading operations and protect the body work.

Duplex Pack:

System with recessed vertical rails in the lateral surfaces and bars able to support 1000 kg allowing palettisation on 2 levels.





Expert in composite technology

The Lamberet insulating panels are the fruit of years of experience, research and development.

It is the mastery of a real technology exclusively dedicated to cold. Associating composite materials with complex implementation and high insulating capacity, this technology gives our panel unique advantages: 16 % more insulating than a panel with metallic sidings, ideal for multi-temperature because it is non-conductive, resistant to impacts and economical to repair, without any metal and therefore no corrosion. The lining used in leading-edge food, nautical, aeronautical industries, is waterproof and vapour proof.



Pack Beef :

The Lamberet bodyworks can be fitted with all types of meat hanging systems known in Europe (tubes, Biralux...).

The isothermal qualities of Lamberet at the service of your cold group.

The lowering of its operational time reduces its consumption, its wear and tear and spaces out the services.

All these points contribute to sustaining its residual value and reducing its cost of ownership.





Made-to-measure:

As proof of its know-how, Lamberet can combine a rolling shutter door and a barn door on the same bodywork.

According to the logistics chosen by the carrier, Lamberet offers all types of rear and side doors: from the «classic» 2 barn doors to the very specific one. Thanks to its experience throughout Europe, Lamberet has been able to adapt to the various types of logistics and legislation. The fixed longitudinal partition makes it possible, together with mobile bulk-heads, to create compartments suited to every type of transport of frozen or fresh products.

The 3 flap barn doors increase flexibility to reach the required compartment without effecting the insulation of the other compartments. The leaf-type or sliding side doors increase accessibility in town and save time during the delivery. Whether it is barn doors and retractable taillift or a door with lift-up rear and folding taillift, Lamberet adjusts to the requirements of each customer.





Smooth recessed interior kickstrips in the floor, 300 mm high to protect the panels against shocks from carts and trolleys. On the 45 mm wall, the kickstrip is recessed into the panel.



As an option, the internal side walls can be protected with Interinox. The stainless steel sheet gives efficient protection against severe impacts from trolleys used in distribution.



Front protection: The grid and rubber bumpers make it possible to protect the front wall from forklift impacts but also to make the air circulation more fluid.



Longitudinal fixed partitions
In general, these make it possible to separate the frozen products and the fresh products in urban delivery (from the rear or the side with side doors and in the partition).



Mobile transversal bulkhead:
Ergonomic, equipped with a synthetic seal reducing friction and which does not harden with cold. Profiles protecting against shocks and optimising the air flows of each compartment.



Transversal fixed partition
Depending on the customer's requirement, the body can be fitted with a transversal fixed partition and an access door to the front compartment.



Semi-recessed rail:
With an oversize of 3 mm, this makes it possible to free precious space for the loading of trolleys. Furthermore, its slight oversize protects the panels from possible impacts.



In order to have easy access in any circumstances, the driver can access the parcels through side leaf-type (single or double), sliding doors or through a gate.



Sliding side door:
With its patented system, the sliding door integrates the bodywork completely and does not interfere with the bottom of the chassis.



Treatment of the body sub-frame by shot blasting and powder coating, 6 year warranty against perforation.




Side door ladder de porte latéral (fixed or retractable) with alarm if retractable.



Lamberet fits its bodyworks with all known types of cooling units on all types of chassis even with natural gas.

Validation of the geometry:

Cabin tilting and load distribution validated on order.

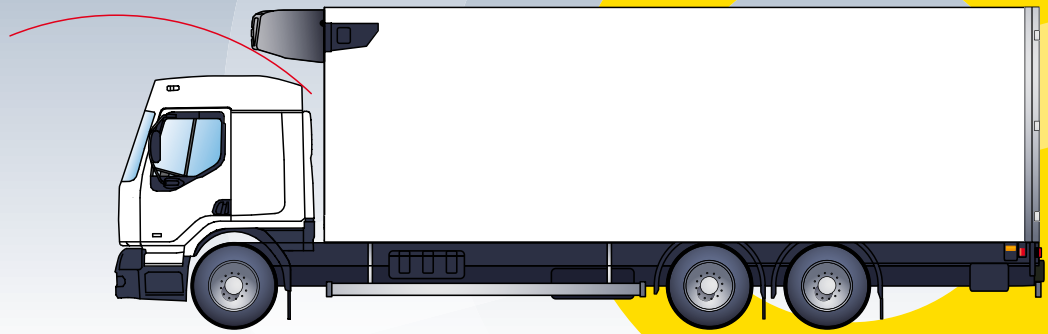

Bodywork dimensions:

Only some combinations of panel heights, widths, lengths and thicknesses are possible depending on the MGW.
Available internal heights: 1m95, 2m05, 2m15, 2m25, 2m35, 2m45, 2m53, 2m60, 2m65, 2m70, 2m75 and 2m80.
Available internal widths: 2m06, 2m16, 2m26, 2m36, 2m46 and 2m50.

Correspondance table between outside bodywork length / number of pallets in single-compartment version:

Outside length ⁽¹⁾	3m45	3m85	4m26	4m67	5m07	5m48	5m89	6m29	6m70	7m11	7m51	7m92	8m33	8m73	9m14	9m55	9m95
Euro pallets ⁽²⁾	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24

⁽¹⁾ Length measured between the outside of the front and rear panels faces. ⁽²⁾ For an inside width of 2m46.

Thickness of the panels according to the product range:

Product	XL-Y	XL-X	SL-Y	SL-X	IA-I	BT-B	EP-E
Side walls	60	60	45	45	35	105	85
Roof	85	115	85	115	85	115	85

Types of available side doors:

Depending on the equipment selected, some side doors might not be available.

1 - Single leaf-type side door


PRODUCT	WIDTH	HEIGHT			
		1 780	1 800	1 930	2 130
XL-Y/XL-X	850	1 780	1 800	1 930	2 130
	1 000	1 800	1 930	2 130	2 300
	1 300	1 800	1 930	2 130	2 430
SL-Y/SL-X	1 000	1 930	2 130	2 430	
	1 300	2 130			
IA-I	850	1 830	1 930	2 130	
	1 000	1 830	1 930	2 130	
	1 300	1 930	2 130		
BT-B	815	1 925			
EP-E	850	1 730	1 930		
	1 000	1 800	1 930		

2 - Single sliding side door

PRODUCT	WIDTH	HEIGHT	
		1 930	2 130
XL-Y/XL-X	915	1 930	2 130
	1 400	1 860	2 130
EP-E	915	1 930	

Types of available rear doors:

Depending on the equipment selected, some rear doors might not be available.

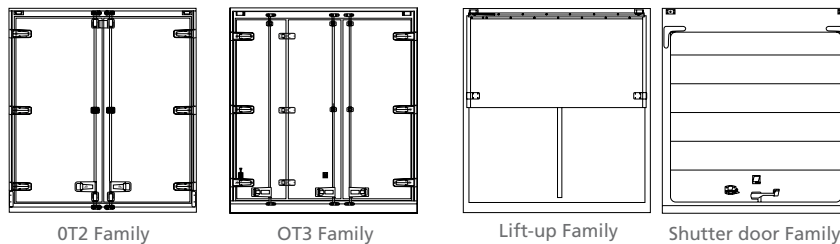

OT2 Family

OT3 Family

Lift-up Family

Shutter door Family

